

Heterogeneous Vinyl Flooring

Zeta[®] Ghana

A fusion of the past and the present. Simple, streamlined faux-wood finishes flow across dark and light wood shades. Allowing you to create a blend of the traditional and the modern in the very same room.



Key Features:

- No Wax, No Polish
- Wear Layer Polyurethane Reinforced (PUR)
- Environmental Friendly (No Real Wood)
- Anti Bacterial, Anti Fungi
- Available in 4" & 7" Widths

Applications:

- Malls
- Homes
- Bars
- Exhibition Stands
- Auditoriums etc.



9539-601-4



9539-602-4



9539-603-4



9539-604-4




9539-605-4




9539-606-4



9539-607-4

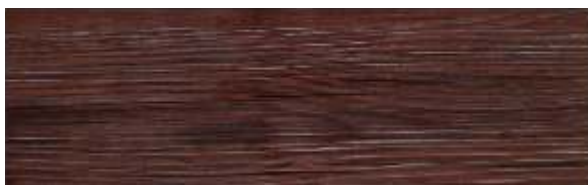

























9539-608-4



Welding Rod No. Zeta Ghana
WR 9539-601-4
WR 9539-602-4
WR 9539-603-4
WR 9539-604-4
WR 9539-605-4
WR 9539-606-4
WR 9539-607-4
WR 9539-608-4
WR-Clear



The solution to every flooring need

Technical Data		Zeta® Ghana
 GENERAL PERFORMANCE: EN 685 : 1996 EN 649 : 1997		<ul style="list-style-type: none"> Heterogeneous Multi-Layered Wear Layer Polyurethane Reinforced
 THICKNESS:	EN 428	3.00 mm
 SHEET:	EN 426	-----
 TILES:	EN 427	102mm x 915mm 185mm x 915mm
 WEIGHT:	EN 430	3.0mm: 5.25 kg/m ² (Max.)
 REACTION TO FIRE:	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2 ASTM E648-06	Class Bfl-S1 ≥ 8 kw/m ² Pass Type I
 FLEXIBILITY:	EN 435 ASTM F137	< 20mm Pass
 SLIP RESISTANCE:	EN 13893 DIN 51130	Class DS R9
 ABRASION RESISTANCE:	EN 660-2 ASTM D3384	Wear Group T Pass
 RESIDUAL INDENTATION:	EN 433 ASTM F970 ASTM F1914	< 0.1 mm Pass Pass
 CASTOR CHAIR:	EN 425	Continuous Use
 LIGHT FASTNESS:	EN 20105: B02 ASTM F1515	> Blue Wool Standard 6 Pass
 WEAR LAYER THICKNESS:	EN 429 ASTM F410	0.50 mm Pass
 ELECTRICAL BEHAVIOR (body voltage):	EN 1815	< 2.0 kV
 THERMAL RESISTANCE:	ISO 8302 (EN 12664) ASTM 1514	< 0.00752 m ² K/W Pass
 DIMENSIONAL STABILITY:	EN 434	<0.4 mm
 STAIN and CHEMICAL RESISTANCE:	EN 423 ASTM F925	Good Resistance Pass
 SMOKE DENSITY:	ASTM E 662-05	< 450
 CLEAN ROOMS:	ASTM F51/68	Class A - non-shedding Suitable for use in following classes of clean room: ISO 1466-11999 Class 4
 FUNGI and BACTERIA RESISTANCE:		Does not favor growth
 MARITIME USAGE:	IMO RES A 653 (16) IMO MSC 61(67) US Coast Guard Approved Marine Equipment Directive	Annex 1 Part 2 (Smoke & Toxicity) Part 5 (Spread of Flame) and Annex 2 (Surface Flammability / Heat Release)  1121
 COLOURS AVAILABLE:		8 Shades

For more details/ clarification regarding technical specifications, handling and installation, please contact Responsive Flooring.
Note: The samples shown are representative. For technical reasons the material may vary in shades and appearance.
The pattern given are with their product codes.



Eucharistic Congress Building No.I, 5 Convent Street, Colaba, Mumbai 400 001, India.

- India: Tel. +91 22 6656 2727 / 6656 2704 • India: Fax +91 22 6656 2798 / 6656 2799
- USA: Tel. +1 732 7592843 • United Kingdom: Tel. +44 208 8199711
- France: +33 1706 15499 • Australia: Tel. +61 29 0378599
- E-mail: enquiry@responsiveindustries.com • URL: www.responsiveindustries.com