RESPONSIVE

www.responsiveindustries.com

IMPACT®

LUXURY VINYL TILE

CARPET TOUCH®

DRY BACK LVT

MEDIUM TO HEAVY FOOT TRAFFIC | SUPERIOR STAIN & SCRATCH RESISTANCE

2.0 mm | 24” x 24” | 9 pc / box | 36 sq.ft / box

IMPACT®

LUXURY VINYL TILE
CARPET TOUCH®

RESPONSIVE
www.responsiveindustries.com

IMP - CTH - 01 White Sands

IMP - CTH - 02 Wheat Husk

IMP - CTH - 03 Coffee Blend

IMP - CTH - 04 Forest Brown

IMP - CTH - 05 Taupe Grey

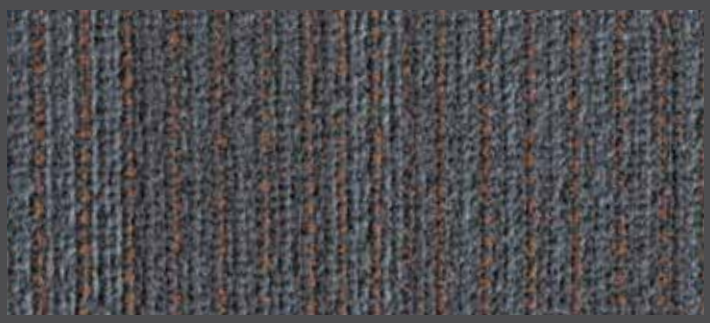

IMP - CTH - 06 Charcoal Grey

IMP - CTH - 07 Blue Grey Symphony

IMP - CTH - 08 Ocean Deep

Easy Installation

Superior Scratch & Stain Resistant

Zero Maintenance

IMPACT®

LUXURY VINYL TILE
CARPET TOUCH®

RESPONSIVE
www.responsiveindustries.com

FEATURES & BENEFITS

- Superior Scratch & Stain Resistant
- Zero Maintenance
- Easy Cleaning
- Carpet Lookk & Feel
- Medium to Heavy Foot Traffic
- Easy Installation

APPLICATIONS

- Offices
- Residential
- Retail
- Hospitality

IMPACT® LUXURY VINYL TILE
CARPET TOUCH®

RESPONSIVE
www.responsiveindustries.com

SPECIFICATION

Luxury Vinyl Tiles for light commercial and heavy commercial

PUR Polyurethane reinforcement | Product Standard: ISO 10582

CERTIFICATION & CLASSIFICATION	STANDARD	IMPACT CARPET TOUCH®
TYPE OF FLOOR COVERING	ISO 10582	LUXURY VINYL TILE
CE CERTIFICATION	EN 14041	Yes
CLASSIFICATION	EN ISO 10874	Commercial : 31 Heavy Commercial : 34

TECHNICAL CHARACTERISTICS	STANDARDS	IMPACT CARPET TOUCH®
TOTAL THICKNESS	EN ISO 2436 (EN 428)	2.0 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	0.30 MM
SURFACE TREATMENT	UV TREATED	PUR
TOTAL WEIGHT	EN ISO 23997 (EN 430)	3300 g/m²
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) Tiles box	24" X 24" / 9 Tiles / box = 36 sq.ft

TECHNICAL PERFORMANCES	STANDARDS	IMPACT CARPET TOUCH®
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	≤ 0.25%
REACTION TO FIRE	EN 13501 – 1	Bfl- S1 glued over A2fl substrate (concrete)
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	Required value : ≤ 0.10mm Average measured value : 0.03mm
FURNITURE LEG	EN 424	No damage
CASTOR CHAIR	EN ISO 4918 (EN 425)	No damage
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	≤ 2mm
THERMAL RESISTANCE	EN ISO 10456	0.07M2 K/W
LIGHT FASTNESS	EN ISO 105 – B02	PASS
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	Good resistance
SLIP RESISTANCE	DIN51130 EN 13893	R9 | PASS

© All contents of this Technical Data Sheet are of the copyright of Responsive Industries Limited. Any duplication in any form without prior permission is strictly prohibited.
The above data is also valid at the time of print. For more details regarding the technical specifications, handling and installation, please contact Responsive Industries Limited.

STANDARDS

floor score
CERTIFIED BY SCS Global Services

ISO 18001
ISO 14001
ISO 9001

CE
EN 14041

VOC Emission
Fire
Electrical
Slip

31
34

PHTHALATE FREE

AN ENGINEERING MARVEL

UV SURFACE TREATMENT: Thickness In Microns
- Transparent PVC Wear Layer 0.3m
- Super Stain And Scratch Resistant
- Completely Waterproof
- Protects From Abrasion

DECORATIVE FILM
- Restores The Colour And Emboss
- Elegant Carpet Designs
- Carpet Look & Feel

OVER ALL THICKNESS **2.0 mm**

FIBER GLASS LAYER
- Provides Dimensional Stability
- Ensures Flat & Even Installation

1mm PVC BACKING LAYER
- Insulates Sound
- Provides Underfoot Comfort

REACH US

RESPONSIVE INDUSTRIES LIMITED : Esperanca Building, 1st Floor, Shahid Bhagat Singh Road, Colaba, Mumbai 400 001. India
Tel: +91 22 6656 2727 / 6656 2704 | Email: enquiry@responsiveindustries.com | Web: www.responsiveindustries.com