

RESPONSIVE 

IMPACT

®

A BETTER FLOOR

TRANQUIL®

SPC FLOORING



14F DROP CLICK SYSTEM

TRANQUIL[®]
SPC FLOORING: I4F DROP CLICK SYSTEM




IMP-TRQ-01 Carrara Grey



IMP-TRQ-02 Sandstone Beige



IMP-TRQ-03 Bellagio Beige

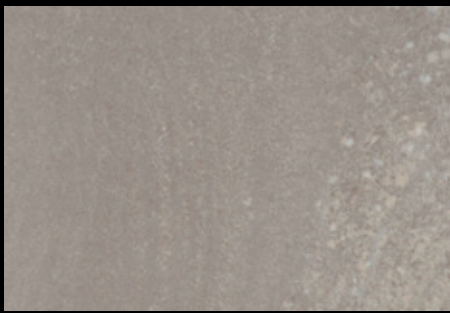


IMP-TRQ-04 Glacier Grey



IMP-TRQ-05 Speckled Travertine



IMP-TRQ-06 Mediterranean Mystery

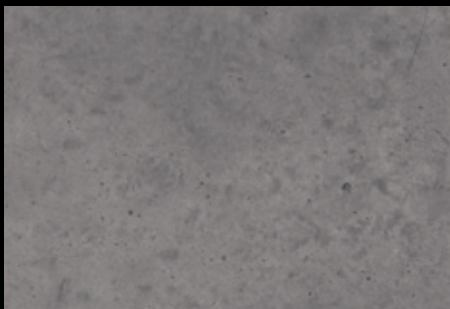

IMP-TRQ-07 Smoke Granite



IMP-TRQ-08 Aged Limestone



IMP-TRQ-09 American Basalt



IMP-TRQ-10 Rich Sandstone



IMP-TRQ-11 Silvery Shale



IMP-TRQ-12 Metamorphic Gneiss



Completely
Waterproof



Drop Click
Technology



Easy
Installation



No Bugs
No Termites



No Adhesive
Required













EIR
Embossed In Register

TRANQUIL[®]
SPC FLOORING: I4F DROP CLICK SYSTEM







A BETTER
FLOOR

FEATURES & BENEFITS

- | | | | | |
|--|--|---|---|---|
| 
Superior Scratch
& Stain Resistant | 
No Bugs
& Termites | 
No Adhesive
Required | 
Completely
Waterproof | 
Easy
Clean |
| 
Natural Looking
Design | 
Zero
Maintenance | 
Superb
Dimensional
Stability | 
Heavy
Foot Traffic | 
Excellent Sound
Insulation |

APPLICATIONS

- | | |
|--|--|
| 
Corporate Offices | 
Residential |
| 
Retail | 
Hospitality |

TRANQUIL®

SPC FLOORING: I4F DROP CLICK SYSTEM

SPC FLOORING FOR HEAVY COMMERCIAL USE

PUR Polyurethane Reinforcement | Product Standard: ISO 10582

CERTIFICATION & CLASSIFICATION	STANDARD	TRANQUIL®
TYPE OF FLOOR COVERING	ISO 10582	SPC
CE CERTIFICATION	EN 14041	Yes
CLASSIFICATION	EN ISO 10874	Heavy Traffic : Class 33

TECHNICAL CHARACTERISTICS	STANDARDS	TRANQUIL®
TOTAL THICKNESS	EN ISO 2436 (EN 428)	5.0 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	20 mil WL 0.50 MM
SURFACE TREATMENT	UV TREATED	PUR
TOTAL WEIGHT	EN ISO 23997 (EN 430)	8000 g/m ²
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) Planks box	11.8" X 23.6" = 19.50 sq.ft 10 Pieces Per Box 300 X 600 mm = 1.80 m ² 10 Pieces Per Box

TECHNICAL PERFORMANCES	STANDARDS	TRANQUIL®
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	≤ 0.10%
REACTION TO FIRE	EN 13501 - 1	Bfl- S1
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	Required Value : ≤ 0.10mm Average Measured Value : 0.03mm
FURNITURE LEG	EN 424	No Damage
CASTOR CHAIR	EN ISO 4918 (EN 425)	No Damage
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	≤ 2mm
THERMAL RESISTANCE	EN ISO 10456	0.07M2 K/W
IMPACT SOUND REDUCTION	EN ISO 140-8 EN ISO 717/2	w = 11 Db
LIGHT FASTNESS	EN ISO 105 - B02	PASS
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	Good Resistance
SLIP RESISTANCE	DIN51130 EN 13893	R9 PASS
ELECTRICAL PROPERTIES	EN 1815 EN 1081	< 2 kV On Concrete R1 > 10 ¹⁰ Ω



ISO 9001
ISO 14001
ISO 18001



EN 14041



VOC Emission



Fire



Electrical




Slip


33



42



TRANQUIL[®]
SPC FLOORING: I4F DROP CLICK SYSTEM

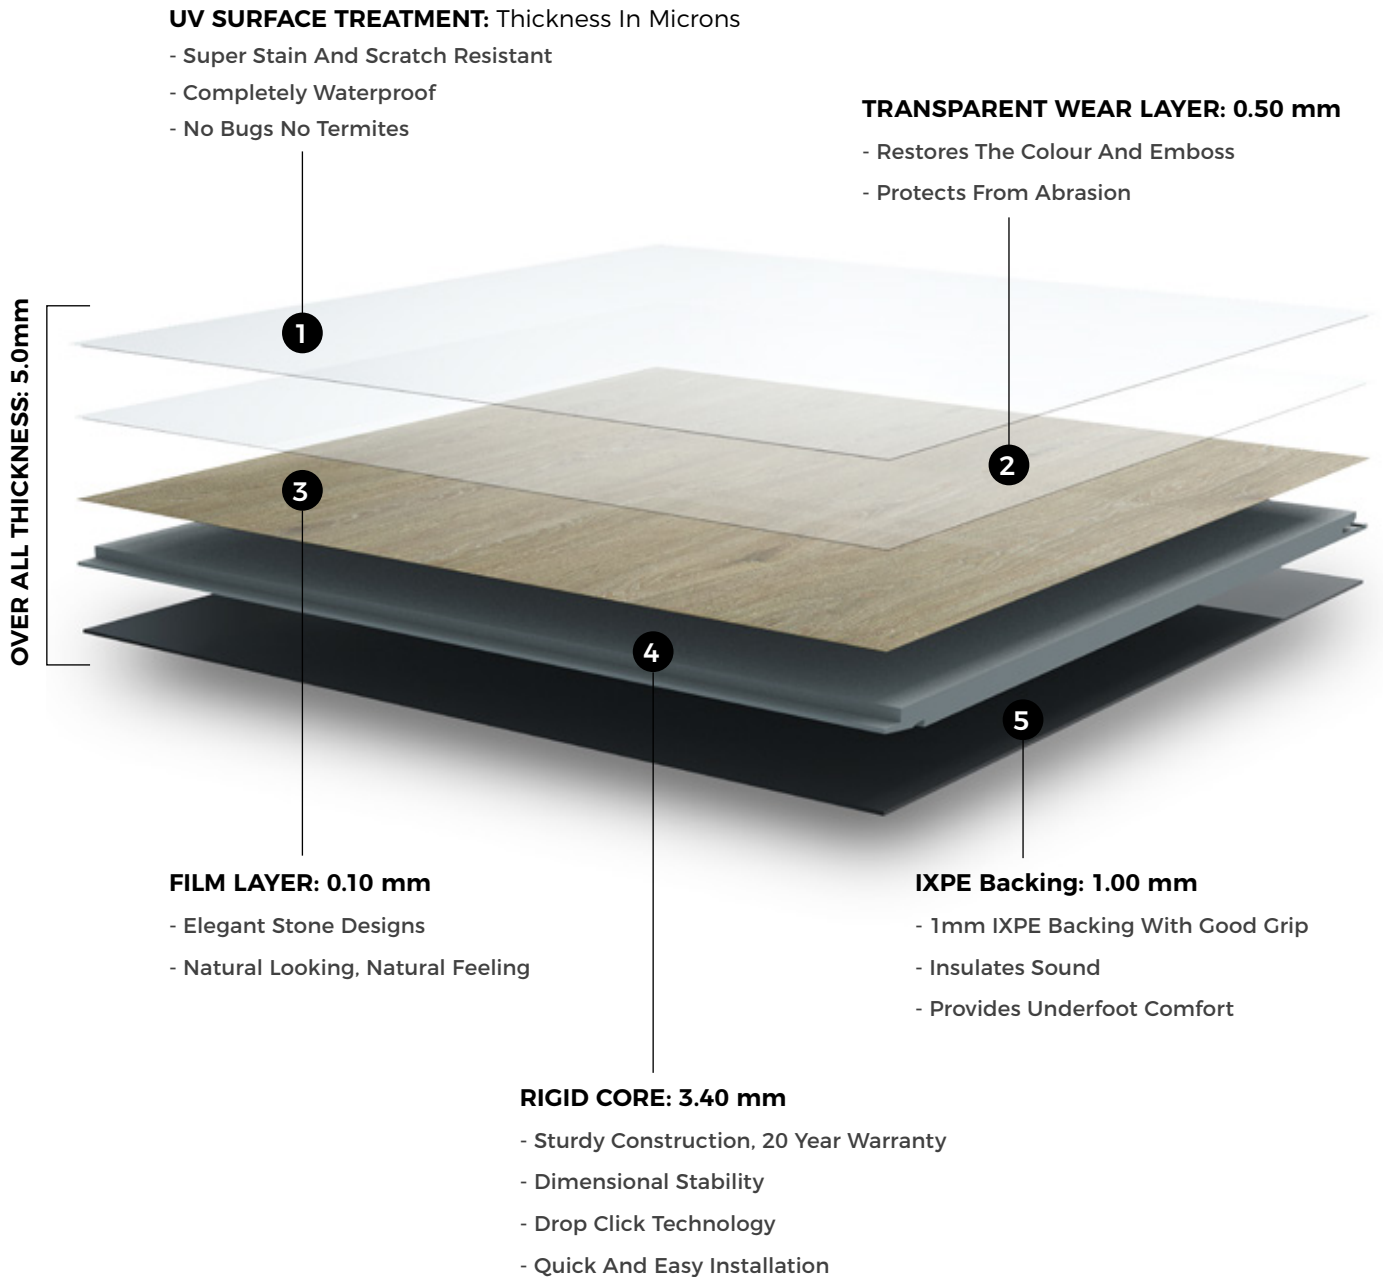

REACH US