

Conductive Vinyl Flooring

Electra Plus®



Getting rid of shocks just got much easier. This range of conductive flooring sports crushed textures on pastel backgrounds. The only time sparks will fly will be when you look at the floor.

Key Features:

- No Wax, No Polish
- Polyurethane Reinforced (PUR)
- Elimination of Static Charge
- Specialised Floor
- Available up to 3.0mm in Sheet & Tiles

Applications:


- Operation Theaters
- Industrial Units
- Computer Server Rooms
- Table Tops
- Education Centers etc.

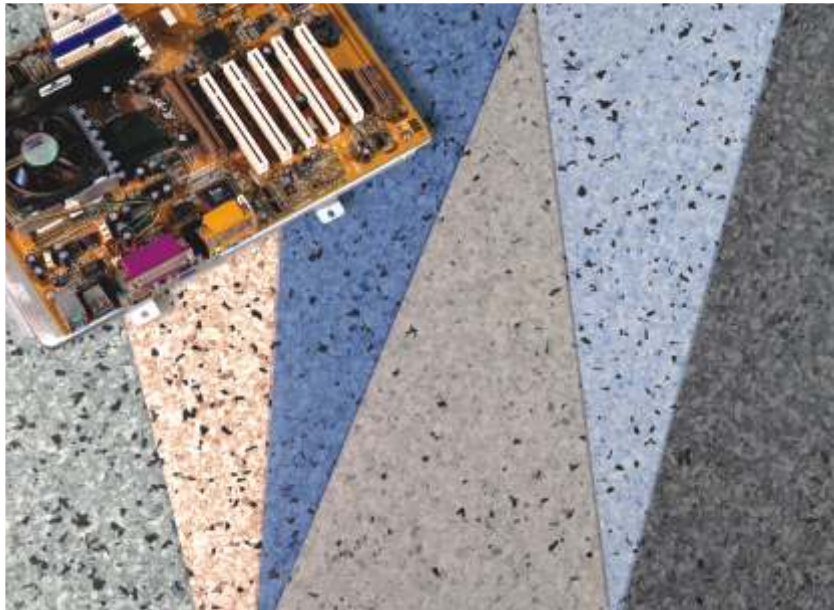

5698-772-4



5698-770-4

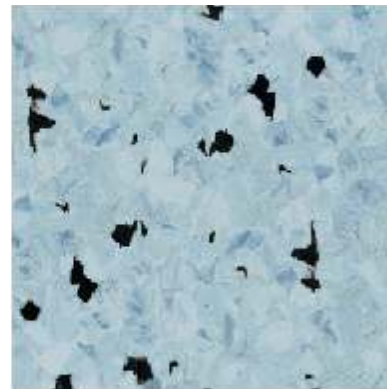

5698-773-4



5698-774-4



5698-771-4



5698-775-4



























Welding Rod No.
Electra Plus

- WR 5698-772-4
- WR 5698-770-4
- WR 5698-773-4
- WR 5698-774-4
- WR 5698-771-4
- WR 5698-775-4
- WR-Clear



The solution to every flooring need

Conductive Vinyl Flooring **Electra Plus[®]**

Technical Data		Electra Plus [®]
 GENERAL PERFORMANCE: EN 685 : 1996 EN 649 : 1997		<ul style="list-style-type: none"> • Homogeneous Conductive Vinyl Flooring • Polyurethane Reinforced
 THICKNESS:	EN 428	2.00 mm 3.00 mm
 SHEET:	EN 426	2.0mm: 2m x 15m = 30m ² 3.0mm: 2m x 15m = 30m ²
 TILES:	EN 427	610mm x 610mm
 WEIGHT:	EN 430	2.0mm: 3.50 kg/m ² (Max.) 3.0mm: 5.25 kg/m ² (Max.)
 REACTION TO FIRE:	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2 ASTM E648-06	Class Bfl-S1 ≥ 8 kw/m ² Pass Type I
 FLEXIBILITY:	EN 435 ASTM F137	< 20mm Pass
 SLIP RESISTANCE:	EN 13893 DIN 51130	Class DS R10
 ABRASION RESISTANCE:	EN 660-2 ASTM D3384	Wear Group P Pass
 RESIDUAL INDENTATION:	EN 433 ASTM F970	< 0.1 mm Static load 800 psi
 CASTOR CHAIR:	EN 425	Continuous Use
 LIGHT FASTNESS:	EN 20105: B02	> Blue Wool Standard 6
 WEAR LAYER THICKNESS:	EN 429	2.0 mm, 3.0 mm
 ELECTRICAL BEHAVIOR (body voltage):	EN 1815	< 2.0 kV
 ELECTRICAL RESISTANCE:	EN 1081	< 10 ⁶ Ω
 DIMENSIONAL STABILITY:	EN 434	<0.4 mm
 STAIN and CHEMICAL RESISTANCE:	EN 423	Good Resistance
 THERMAL RESISTANCE:	ISO 8302 (EN 12664)	< 0.00512 m ² K/W
 SMOKE DENSITY:	ASTM E 662-05	< 450
 FUNGI and BACTERIA RESISTANCE:		Does not favor growth
 CLEAN ROOMS:	ASTM F51/68	Class A - non-shedding Suitable for use in following classes of clean room: ISO 1466-11999 Class 4
 MARITIME USAGE:	IMO RES A 653 (16) IMO MSC 61(67) US Coast Guard Approved Marine Equipment Directive	Annex 1 Part 2 (Smoke & Toxicity) Part 5 (Spread of Flame) and Annex 2 (Surface Flammability / Heat Release) 1121
 COLOURS AVAILABLE:		6 Shades

For more details/ clarification regarding technical specifications, handling and installation, please contact Responsive Flooring.
Note: The samples shown are representative. For technical reasons the material may vary in shades and appearance.
The pattern given are with their product codes.



Eucharistic Congress Building No.I, 5 Convent Street, Colaba, Mumbai 400 001, India.

- India: Tel. +91 22 6656 2727 / 6656 2704 • India: Fax +91 22 6656 2798 / 6656 2799
- USA: Tel. +1 732 7592843 • United Kingdom: Tel. +44 208 8199711
- France: +33 1706 15499 • Australia: Tel. +61 29 0378599
- E-mail: enquiry@responsiveindustries.com • URL: www.responsiveindustries.com